

```
greeting: 'r' 's' 'm' 't' 'p' ' ' role ' ' DOMAIN ' ' DOMAIN '\n';
role: 't' | 'r';
```

```
envelope: 'i' '\n' | 'i' ADDRESS ' ' numb ' ' notify '\n' 'm' NON_NL '\n'
          optext 's' ADDRESS '\n' rcpts '\n';
notify: 'n' | 'z' | 'b' | 'c';
optext: | LETTER NON_NL '\n' optext;
rcpts: 't' ADDRESS '\n' | 't' ADDRESS '\n' rcpts;
```

```
envstatus: optextrepl rcpsstats sendstatus '\n';
optextrepl: | optext '\n';
rcpsstats: rcpsstat '\n' | rcpsstat '\n' rcpsstats;
rcpsstat: msgstat | rcpreject NON_NL;
rcpreject: 'n' | 'f';
```

```
sendstatus: 'Y' | 'R' numb ' ' NON_NL | sendreject NON_NL;
sendreject: 'N' | 'F';
```

```
message: fragment | fragment message ;
fragment: numb '\n' ANYBYTES '.' ;
msgstatus: msgstat '\n';
msgstat: 'y' | 'r' numb ' ' NON_NL;
numb: digit | digit numb;
digit: '0' | '1' | '2' | '3' | '4' | '5' | '6' | '7' | '8' | '9';
```

Fig. 1

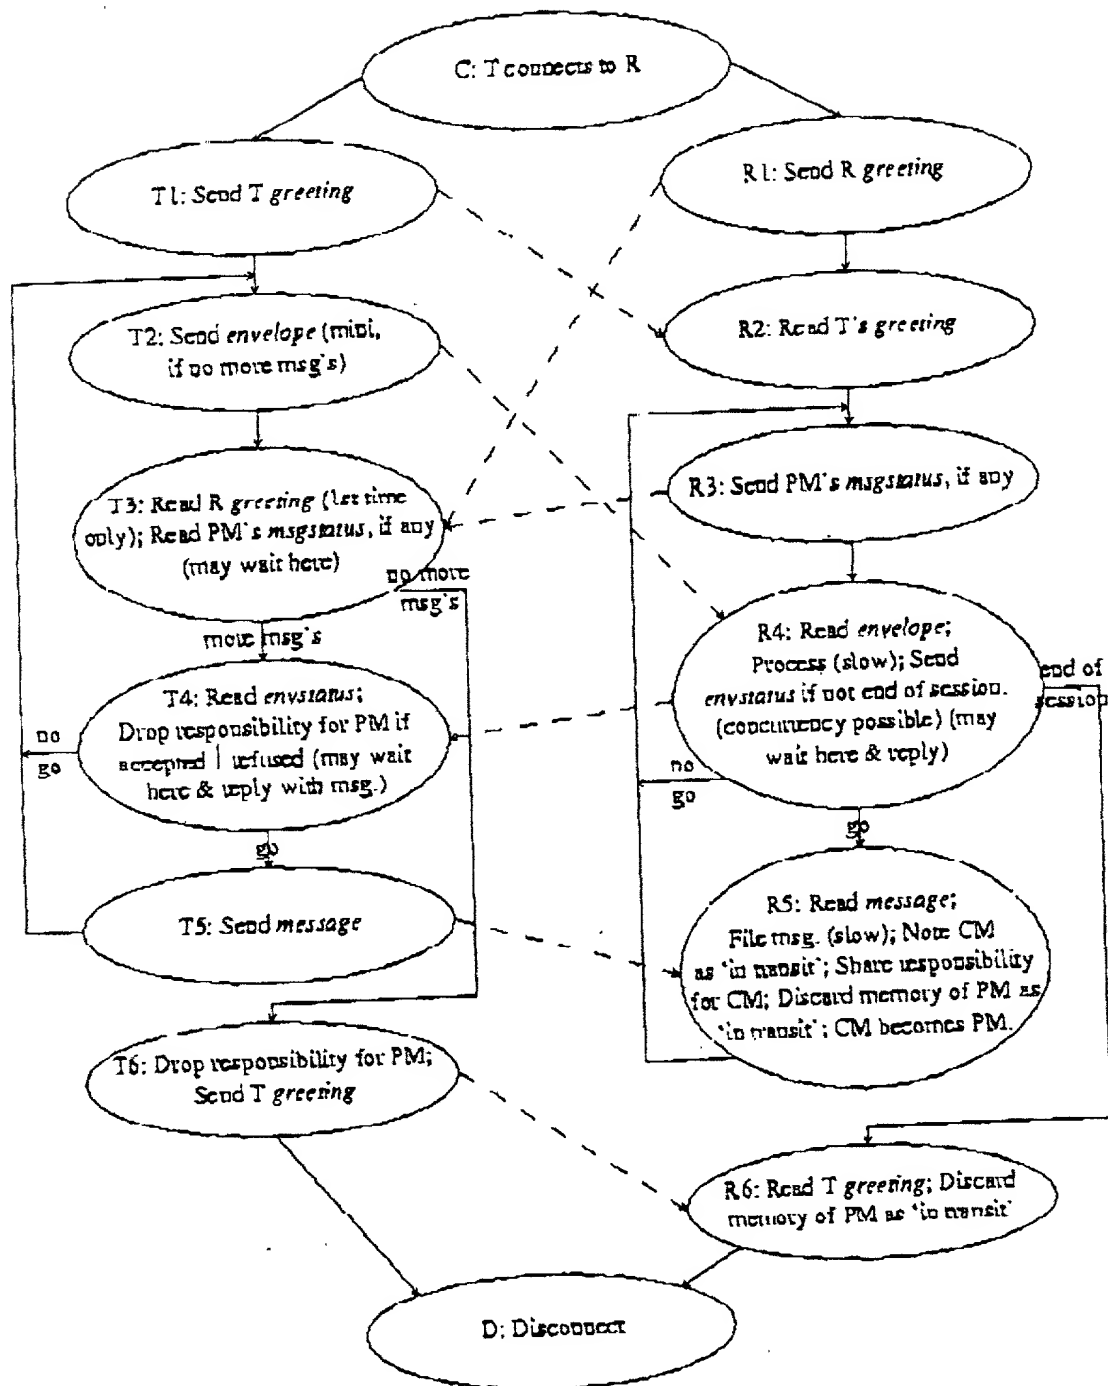


Figure 2: